



LOWER RADIATOR HOSE HEATERS

Efficient engine heating from die-cast aluminum design

- Installs in minutes in non-corrugated lower radiator hose
- Available in five hose sizes for best coverage
- Thermostatically protected (245°F/118°C maximum heater temperature)
- Replaceable cordset
- Consult application section for size/use information

PART NO.	FITS HOSE SIZE	WATT	VOLT	DIM A	DIM B	DIM C
3200001	1" (2.4cm)	375	120	3.5" (8.6cm)	3" (7.5cm)	2.5" (6.4cm)
3200002	1-1/4" (3.1cm)	375	120	3.5" (8.6cm)	3" (7.5cm)	2.5" (6.4cm)
3200003	1-1/2" (3.7cm)	600	120	4" (10cm)	3" (7.5cm)	3" (7.5cm)
3200004	1-3/4" (4.3cm)	600	120	4" (10cm)	3" (7.5cm)	3" (7.5cm)
3200005	2" (5cm)	600	120	4.25" (10.5cm)	3" (7.5cm)	3.25" (8cm)

Note: All dimensions reflect approximate installation space requirements, not exact product measurements. Dimension "A" includes cord.

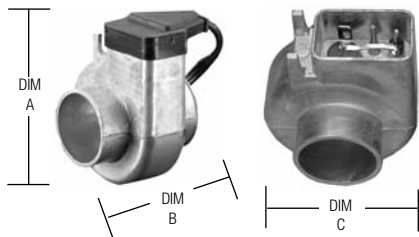


Lower Radiator Hose Heater
Hose must have a minimum 15° rise
Must be installed in smooth, molded hose
Must have direct access to engine water jacket




Replacement Cordsets
120 Volt AC, 42" (112cm)

For heaters with this configuration.
Heater stamped with Model C (example 150C) on bottom of unit.
Part No. 3600009



For heaters with this configuration.
Heater stamped with Model D (example 150D) on bottom of unit.
Part No. 3600047



Tube type hose heater replacement cord
Part No. 3600017


MAGNETIC HEATERS

Magnetic utility heater provides heat when and where you need it.

Super Heat Magnet®

- 200 Watt - 120 Volt AC
- Built-in thermostat maintains optimum temperature—will not exceed 250°F (121°C)
- Quick grip handle protects hands from heat
- Dimensions - Length: 4-3/8" (11cm), Width: 2-1/2" (6.3cm), Height: 3" (7.5cm) (including handle)

PART NO.	DESCRIPTION
3400017	UL/CSA Approved Model - 6 in. (15cm) cordset



RADIANT HEATERS

Bolt-on Radiant Heaters

- For applications with no core plug or core plug access
- Heating element conducts heat directly
- Universal mounting clamp included

PART NO.	DIMENSIONS	WATTS	VOLT	REPLACEMENT CORDSET
3400014	6" x 6" (15.2cm x 15.2cm)	500	120	3600002
3400011	4" x 4" (10.1cm x 10.1cm)	300	120	3600002

